

GENERAL FEATURES

- Environmentally friendly
- Can be used at vertical or horizontal orientation
- High Reliability and Good Quality
- High gas recombination efficiency
- High Power Density
- Maintenance-Free Operation


APPLICATIONS

- UPS & EPS
- Emergency lighting Systems
- Medical Equipment
- Cable TV Systems
- Alarm Systems
- Electric Test Equipment
- Security Systems



DIMENSIONS & WEIGHT

Length(mm)	151±1
Width(mm)	65±1
Height(mm)	94±1
Total Height(mm)	100±1
Weight(kg)	1.90±3%

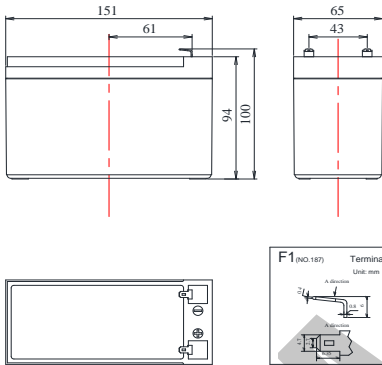

COMPLIED STANDARDS

IEC 60896-21/22	JIS C8704
YD/T799	BS6290 part4
GB/T 19638	UL 1989

TECHNICAL SPECIFICATIONS



Nominal Voltage		12V(6 cells per unit)
Design Floating Life @25°C		5 Years
Nominal Capacity @25°C (20 hour rate@0.31A,10.50V)		6.20Ah
Capacity @25°C	10 hour rate (0.59A,10.8V)	5.90Ah
	5 hour rate (1.09A,10.5V)	5.45Ah
	1 hour rate (4.26A,9.6V)	4.26Ah
Internal Resistance	Full Charged Battery @25°C	≤40.0mΩ
Ambient Temperature	Discharge	-20°C~50°C
	Charge	-20°C~50°C
	Storage	-20°C~50°C
Max.Discharge Current @25°C		90A(5s)
Capacity affected by Temperature (10 hr Capacity)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-Discharge @25°C per Month		3%

Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 1.86A Voltage 13.6-13.8V
	Cycle Use	Initial Charging Current Less than 1.86A Voltage 14.4-14.9V

BATTERY DISCHARGE TABEL

Discharge Constant Current per Cell (Amperes at 25°C)







F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	21.31	15.41	12.14	7.10	4.98	4.26	2.51	1.72	1.15	0.77	0.62	0.328
1.67V	20.93	15.24	11.80	6.98	4.88	4.19	2.46	1.69	1.13	0.76	0.61	0.322
1.70V	20.54	14.81	11.54	6.85	4.80	4.11	2.42	1.65	1.10	0.74	0.60	0.316
1.75V	20.15	14.12	11.19	6.72	4.70	4.03	2.37	1.63	1.09	0.73	0.59	0.310
1.80V	19.38	13.95	10.85	6.46	4.52	3.88	2.28	1.56	1.04	0.70	0.59	0.306

Discharge Constant Power per Cell (Watts at 25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	41.02	30.40	23.42	13.67	9.58	8.21	4.83	3.31	2.20	1.48	1.22	0.646
1.67V	40.28	29.88	22.73	13.42	9.39	8.06	4.74	3.25	2.16	1.46	1.21	0.629
1.70V	39.53	29.28	22.13	13.18	9.22	7.91	4.65	3.19	2.13	1.43	1.18	0.620
1.75V	38.79	27.56	21.53	12.93	9.05	7.76	4.56	3.13	2.08	1.40	1.16	0.611
1.80V	37.29	26.69	20.93	12.43	8.71	7.46	4.39	3.01	2.01	1.34	1.13	0.603

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **MCA** for the latest information.

PERFORMANCE CHARACTERISTICS

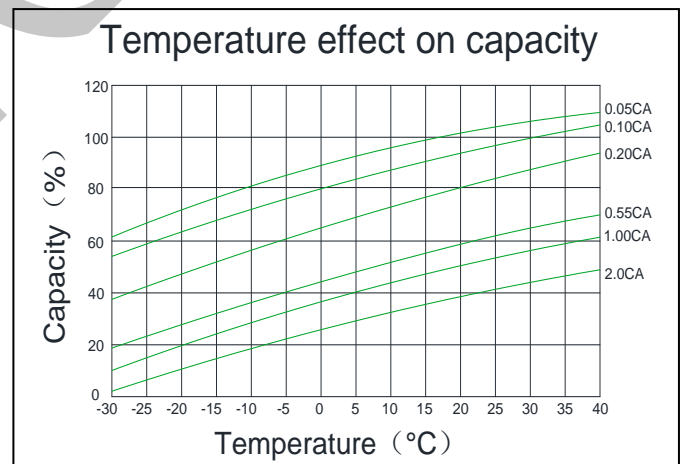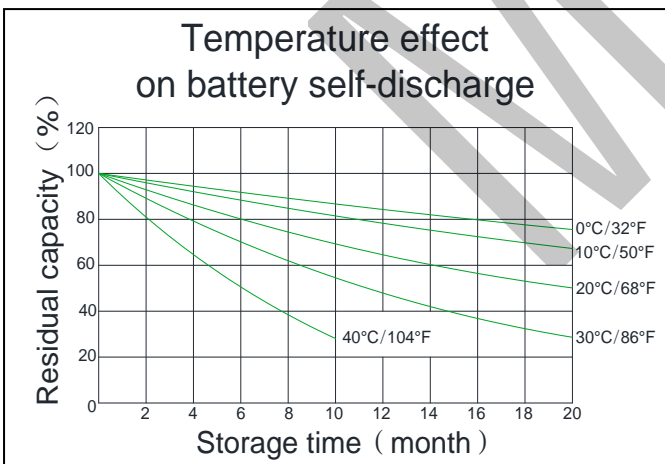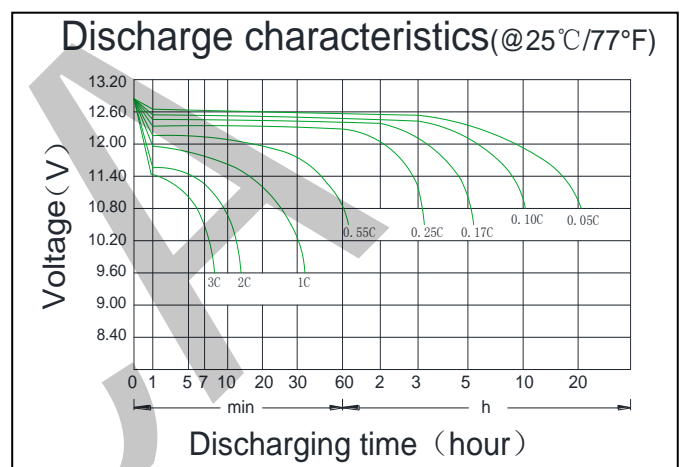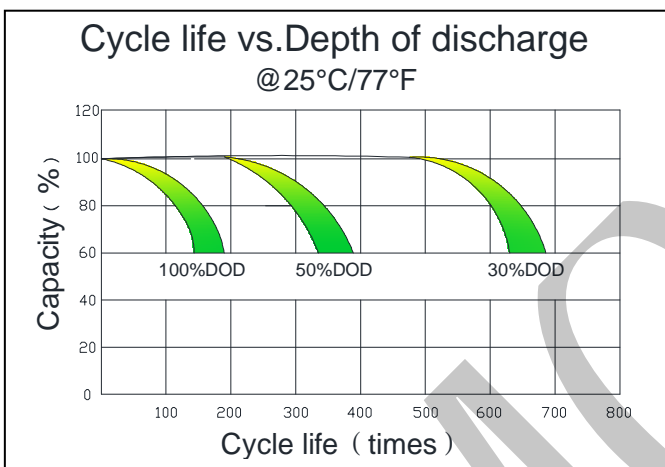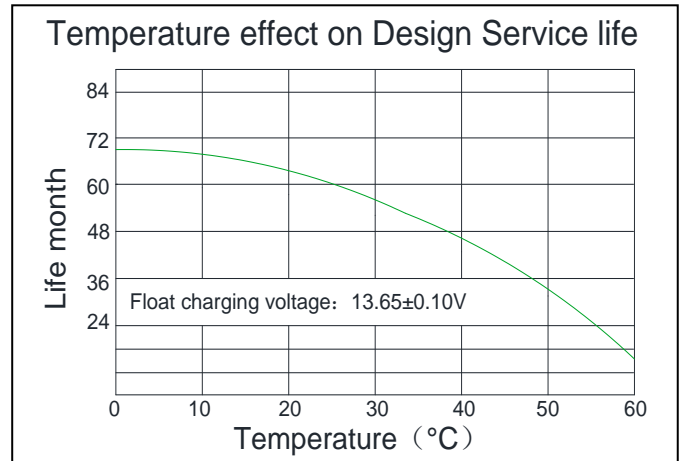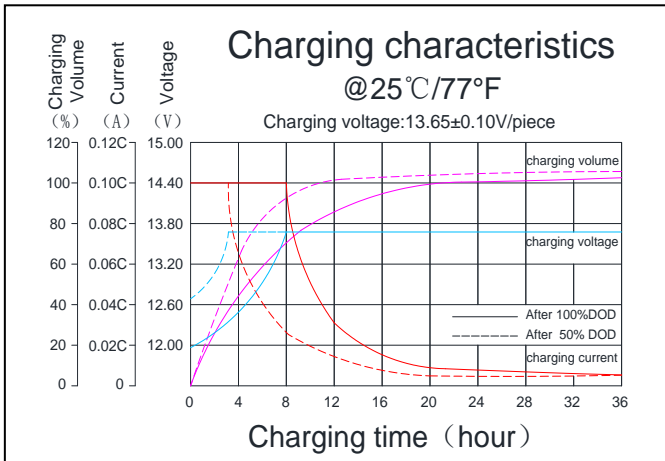

BATTERY CONSTRUCTION

Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Thick high Sn low Ca grid with special paste	Balanced Pb-Ca grid for improved recombination efficiency	ABS (UL94-V0 optional)	Flame Si-Rubbeand aging resistancer	Female Copper Insert (F1/F2)	Advanced AGM separator for high pressure cell design	Dilute high purity sulphuric acid	Two layers epoxy resin seal

MCA Battery Manufacture Co.,Ltd.

Cangjiang Industrial Estate Gaoming District Foshan City China
 Tel: +86-757-66752600 Fax: +86-757-66752601



[HTTP : //WWW.MCABATTERY.COM](http://www.mcabattery.com)